

# Open Frame AC Input AT Type

## ACE-890A

86 W AC-DC Open Frame AT Power Supply




**PFC**



<b>Input Type</b>	85 ~ 264 VAC Full Range				
<b>Input Frequency</b>	47~63Hz				
<b>Input Current</b>	2A (RMS)@115VAC, 1A (RMS)@230VAC				
<b>Inrush Current</b>	25A Max for 115VAC, 50A Max for 230VA				
<b>Output Voltage</b>	+5 V	+12 V	-5 V	-12 V	+24 V
<b>ACE-890A</b>	10 A	2.5 A		0.5 A	
<b>Efficiency</b>	70%				
<b>Temperature</b>	0°C ~ 50°C (Operating), -20°C ~ 85°C (Storage)				
<b>MTBF (hrs)</b>	268,000				
<b>Output Connector</b>	Optional Cable				
<b>Dimensions</b>	152.4 x 89 x 39 mm				

### Dimensions (Unit: mm)

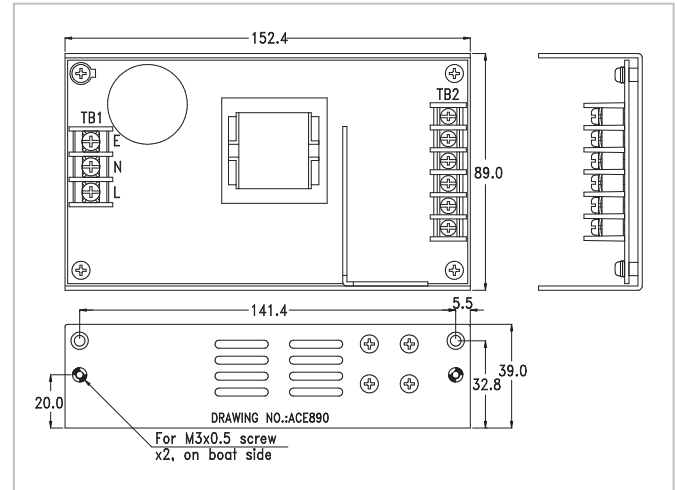

### Ordering Information

Part No.	Description
ACE-890A-RS	86W AC-DC Open Frame AT Power Supply

<b>Option 1</b>	<b>AT P8P9 Backplane Solution</b>
	<b>PN: CB-890P8P9-RS</b> 30 cm DC cable AT power to P8P9, HDD and SATA connectors

## ACE-870A

70 W AC-DC Open Frame AT Power Supply




**PFC**



<b>Input Type</b>	85 ~ 264VAC Full Range				
<b>Input Frequency</b>	47~63Hz				
<b>Input Current</b>	1.5A (RMS)@115VAC, 0.8A (RMS)@230VAC				
<b>Inrush Current</b>	25A Max for 115VAC, 50A Max for 230VAC				
<b>Output Voltage</b>	+5V	+12V	-5V	-12V	+24V
	7A	2.5A	0.3A	0.3A	
<b>Efficiency</b>	70%				
<b>Temperature</b>	0°C ~ 50°C (Operating), -20°C ~ 85°C (Storage)				
<b>MTBF (hrs)</b>	296,000				
<b>Output Connector</b>	Optional Cable				
<b>Dimensions</b>	127 x 81 x 50 mm				

### Dimensions (Unit: mm)

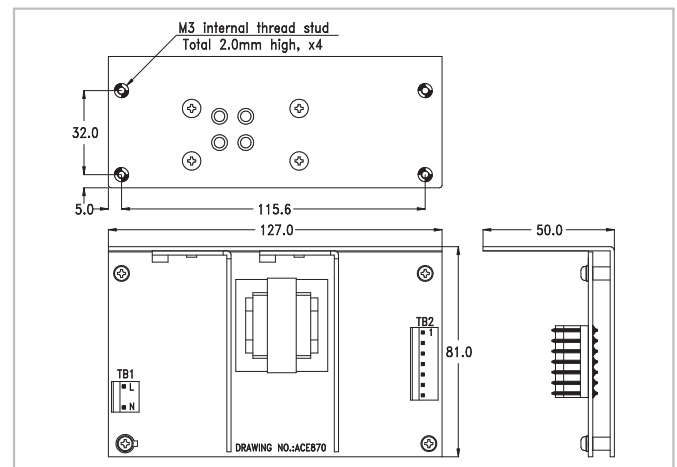

### Ordering Information

Part No.	Description
ACE-870A-RS	70W AC-DC Open Frame AT Power Supply

<b>Option 1</b>	<b>AC Input Solution</b>
	<b>PN: CB-870EC-RS</b> 20 cm AC input cable with fuse
<b>Option 2</b>	<b>AT P8P9 Backplane Solution</b>
	<b>PN: CB-870P8P9-RS</b> 30 cm DC cable AT power to P8P9, HDD and SATA connectors